

### Description:

ESLURRIS SINTETICO consists of a paste-like product made of a uniform mix of aggregates, graded mineral fillers and thermoplastic synthetic resin based emulsion.

### Uses:

It is used in sports courts, garden paths, garages, etc.

### Features & benefits:

### Surface preparation:

The background of application must be levelled, clean, free of dust and loose particles. Dampen the surface when applying at high temperatures. Do not apply at temperatures below +10°C.

### Application:

- Mix the content of each package until making it homogeneous.
- It is hard applied using a trowel or rubber rake.
- Onto concrete or old asphalt, it is necessary to use IMPRILURRIS primer previously.
- Once priming is dry, apply one coating of ESLURRIS SINTETICO uniformly without overlapping.
- After 24 hours, apply a second coating so as to achieve a perfect finish. When using a trowel, apply in a single coating without overlapping in more than 3 mm thick coating.
- In order to ensure adherence of ESLURRIS SINTETICO onto the concrete support, the latter must not be in contact with damp areas so as to avoid rising dampness that would cause the pavement to come off.
- The concrete support must be dry and properly primed.

### TechnicalFeatures:

- : Great adherence.
- Density: 1.55 Kg/L ± 0.05 g/cm<sup>3</sup> at 20°C
- Colour/s: verde, rojo and other colours upon request.

### Coverage:

1 to 1.5 kg per m<sup>2</sup>.

### Clean up:


Clean using large amounts of water.

### Storage:

It is recommended to store this product for 1 year in tightly closed original packages in a cool dry place at temperatures above 4°C.

### Packaging:

Available in packs of:  
 -: 25 Kg

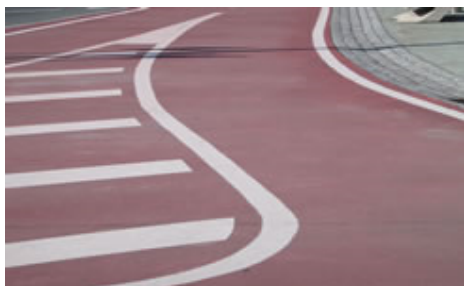

### Health and safety advice :



The information provided on this technical data sheet and particularly the recommendations for the application and use of the product is based on our current knowledge and are provided in good faith, considering that the products are used, handled and stored under normal conditions and within the limits of its useful life. The possible differences between the materials, supports, and real conditions in the application site can be so important that it is no possible to establish a warranty with this document or any other information provided. The user must verify with a suitability test that the product conforms to the required use. Users should refer to the information included in the last technical data sheet edition.