

Description:

TAIS consists of a one component chlororubber based product combined with mineral pigments that are stable to light. It is ideal as anti-dust treatment on concrete supports.

Uses:

It is used for finishing fibrocement boards and concrete supports.

Features & benefits:

EXCELLENT DURABILITY.EXCELLENT RESISTANCE TO BLEAKNESS.EXCELLENT RESISTANCE TO THE PASSING OF TIME.IT PREVENTS DUST FORMATION. EASY APPLICATION.

Surface preparation:

The background of application must ensure proper setting, being dry, free of grease, oil, incompatible paints, dust and loose particles.

Application:

- Apply one layer of IMPRIMAIS, IMPRIDUR or TAIS onto a sound support by diluting 50% in DISOLUAIS(for porous supports).
- Once priming is dry, TAIS is applied in as many coatings as considered necessary using a paint brush, roller or gun(by diluting with DISOLUAIS).

TechnicalFeatures:

Density: 1.47 Kg/L \pm 0.07

-: It prevent erosion and dust formation (anti-dust).

-: It increases resistance of the support to friction, abrasion, aggressive waters and chemical products.

-: The pigments are stable to light.

Viscosity: 8.000 \pm 4.000 mPa.s

Dry upon touching: 3 Hrs.

Colour/s: Blanco, verde, rojo teja, gris, negro and translucent.

Coverage:

3 m2 per l.

Clean up:

Clean using our greasy solvent DISOLUAIS.

Storage:

It is recommended to store this product for 1 year in its tightly closed original packages, with no exposure to extreme temperatures and protected against bleakness.

The information provided on this technical data sheet and particularly the recommendations for the application and use of the product is based on our current knowledge and are provided in good faith, considering that the products are used, handled and stored under normal conditions and within the limits of it's useful life. The possible differences between the materials, supports, and real conditions in the application site can be so important that it is no possible to establish a warranty with this document or any other information provided. The user must verify with a suitability test that the product conforms to the required use. Users should refer to the information included in the last technical data sheet edition.

Packaging:

Available in packs of:

Verde and translucent: 0.75 L

4 L

20 L

Amarillo, Blanco, Gris, Negro and Rojo Teja: 0.75 L

4 L

20 L

Health and safety advice :

R10 -- Flammable

R20 -- Harmful by inhalation

R38 -- Irritating to skin


S21 -- When using do not smoke

S23 -- Do not breathe gas/fumes/vapour/spray (appropriate wording to be specified by the manufacturer)

S27 -- Take off immediately all contaminated clothing

S36 -- Wear suitable protective clothing

S45 -- In case of accident or if you feel unwell seek medical advice immediately (show the label where possible)

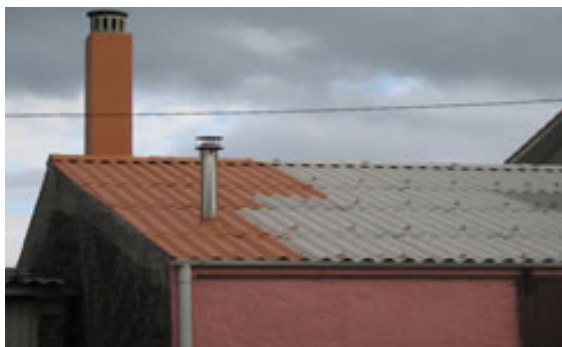

The information provided on this technical data sheet and particularly the recommendations for the application and use of the product is based on our current knowledge and are provided in good faith, considering that the products are used, handled and stored under normal conditions and within the limits of its useful life. The possible differences between the materials, supports, and real conditions in the application site can be so important that it is no possible to establish a warranty with this document or any other information provided. The user must verify with a suitability test that the product conforms to the required use. Users should refer to the information included in the last technical data sheet edition.