

Description:

Powder product to be mixed with water so as to form a plastic paste used for plastering, whitewash cracks and chippings on walls and ceilings, both in interiors and exteriors.

Uses:

Used so as to eliminate irregularities on surfaces to be painted afterwards (in interiors and exteriors), to level rendered supports as well as to eliminate cracks and fissures.

Features & benefits:

EASY APPLICATION. EXCELLENT WORKABILITY. STRONG HARDNESS.

Surface preparation:

The background of application must be clean and perfectly dry, free of grease, saltpeter and dust, being compact and firm.

Application:

- Se mezcla con agua hasta conseguir la masa plástica necesaria para ser aplicada facilmente.
- Aplicar mediante llana sin dientes o con espátula, en capa fina.
- Sellar una vez seca la aplicación con pinturas TEAIS, ?nicas compatibles.
- Para pintar sobre el emplastecido dejar transcurrir 50 Horas m?nimo, desde su ?ltima aplicaci?

TechnicalFeatures:

Water absorption: $35 \pm 3\%$
Powder density: $0.85 \text{ g/cc} \pm 0.05$
Mass of density: $1.900 \text{ g/cc} \pm 0.05$
Open time: $> 45 \text{ min.}$
Water retention: $> 97\%$
Capillarity: Adherence: $> 5 \text{ kg/cm}^2$
Compressive resistance: $> 150 \text{ kg/cm}^2$
Flexural strength resistance: $> 45 \text{ kg/cm}^2$

Coverage:

1 m² per kg in 1 mm thick coating.

Clean up:

Clean with large amounts of water.

Storage:

It is recommended to store this product for 2 years in its tightly closed original packages protected against bleakness.

The information provided on this technical data sheet and particularly the recommendations for the application and use of the product is based on our current knowledge and are provided in good faith, considering that the products are used, handled and stored under normal conditions and within the limits of it's useful life. The possible differences between the materials, supports, and real conditions in the application site can be so important that it is no possible to establish a warranty with this document or any other information provided. The user must verify with a suitability test that the product conforms to the required use. Users should refer to the information included in the last technical data sheet edition.



PROFESSIONAL CONSTRUCTIVE SOLUTIONS

©TEAIS S.A. - All rights reserved - Avda. da Enerxía, nº 153, Pol. Ind. de Sabón - 15143 Arteixo, A Coruña
Telf.: 981 600 966 - Fax: 981 601 508 - Email: info@teais.es



DIRECTION GÉNÉRALE
Jonquet Face MTN Internet
Tél.: (+229) 21 33 33 48
95 96 00 08

04 B P : 0526 Cotonou
contact@hbphenin.com
www.hbphenin.com

DIRECTION COMMERCIALE
HBP New City
Moro Militaire à côté de Taxi Lobo
Tél.: (+229) 21 32 48 48
95 02 72 72 - 94 00 61 61

Packaging:


Available in packs of:

EXTERIORS: 1 Kg

4 Kg

20 Kg

Health and safety advice :

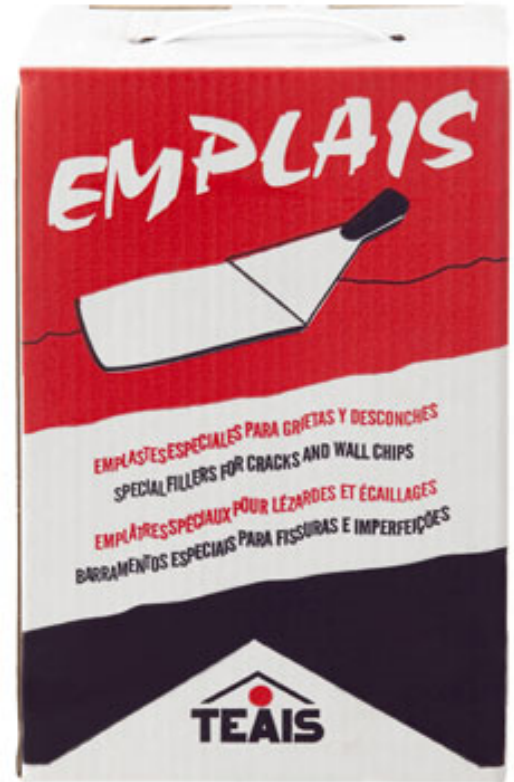

The information provided on this technical data sheet and particularly the recommendations for the application and use of the product is based on our current knowledge and are provided in good faith, considering that the products are used, handled and stored under normal conditions and within the limits of its useful life. The possible differences between the materials, supports, and real conditions in the application site can be so important that it is no possible to establish a warranty with this document or any other information provided. The user must verify with a suitability test that the product conforms to the required use. Users should refer to the information included in the last technical data sheet edition.



PROFESSIONAL CONSTRUCTIVE SOLUTIONS

©TEAIS S.A. - All rights reserved - Avda. da Enerxía, nº 153, Pol. Ind. de Sabón - 15143 Arteixo, A Coruña

Tel.: 981 600 966 - Fax: 981 601 508 - Email: info@teais.es



DIRECTION GÉNÉRALE
 Jonquet Face MTN Internet
 Tél.: (+229) 21 33 33 48
 95 96 00 08

04 B P : 0526 Cotonou
 contact@hbpbenin.com
 www.hbpbenin.com

DIRECTION COMMERCIALE
 HBP New City
 Maro Militaire 3 côté de l'Hotel Logo
 Tél.: (+229) 21 32 48 48
 95 02 72 72 - 94 00 61 61