

### Description:

LASTOIS TECHUMBRES is a waterproofing elastic waterproofing based on acrylic copolymers used for decks, hips, valleys, chimneys, laylights, non-passable decks, etc.

### Uses:

It is used for waterproofing decks, roofs and chimney borders. It can be reinforced with VELOAIS.

### Features & benefits:

EXCELLENT WATERPROOFING.GREAT ELASTICITY.GREAT RESISTANCE TO BLEAKNESS.

### Surface preparation:

The background must be dry and no trace of contaminating particles, by priming conveniently.

### Application:

- Apply with a paint brush or roller in as many coatings as required until reaching 1 mm thick coating approximately, within a time interval of 24 hours.

### TechnicalFeatures:

Colour/s: negro, rojo teja, blanco and gris.

Density: 1.32 Kg/L  $\pm$  0.05 g/cm<sup>3</sup> at 20°C.

Viscosity: 20.000  $\pm$  10.000 mPa.s

Dry upon touching: Elongation until breaking point: >300%

--: Resistant to bleakness, U.V. rays and sulphurous steam.

--: Great adherence to the support and easy application.

### Coverage:

2 kg per m<sup>2</sup>.

### Clean up:

Clean using large amounts of water.

### Storage:

It is recommended to store this product for 2 years in tightly closed original packages in a cool dry place at temperatures above 5°C.


### Packaging:

Available in packs of:

.: 1 Kg

5 Kg

20 Kg

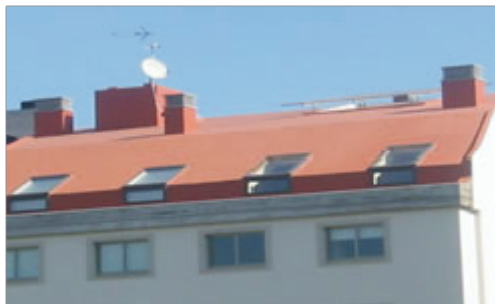

### Health and safety advice :

R43 -- May cause sensitisation by skin contact



The information provided on this technical data sheet and particularly the recommendations for the application and use of the product is based on our current knowledge and are provided in good faith, considering that the products are used, handled and stored under normal conditions and within the limits of its useful life. The possible differences between the materials, supports, and real conditions in the application site can be so important that it is no possible to establish a warranty with this document or any other information provided. The user must verify with a suitability test that the product conforms to the required use. Users should refer to the information included in the last technical data sheet edition.